




全亨科技 -- 专业的条码设备供应商和系统集成商

全国统一服务热线: 400-1199-021

- 首页
- 关于公司
- 条码产品
- 自主开发
- 应用方案
- 下载中心
- 条码知识
- 联系我们
- 条码新闻
- 人才招聘

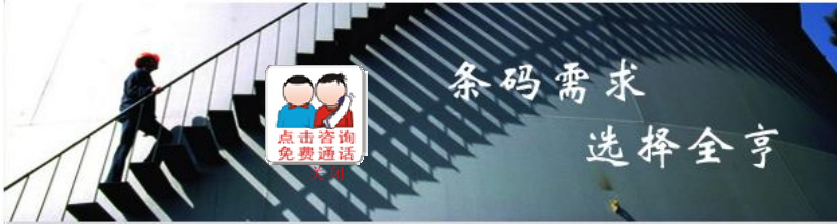

**条码产品**

意大利Datalogic条码扫描器

**条码打印机**

- 美国Intermec
- 美国斑马Zebra
- 美国Datamax
- 美国科立得Cognitive
- 美国Printronix
- 日本佐藤Sato
- 日本Ring
- 日本Toshiba-Tec
- 日本新盛shinsei
- 日本西铁城citizen
- 台湾Godex
- 台湾TSC
- 韩国Woosim
- 德国CAB

**条码扫描器**

- 美国intermec
- 美国Symbol
- 美国HHP(honeywell)
- 美国Metrologic
- 美国Microscan
- 美国PSC
- 意大利Datalogic
- 福建新大陆
- 台湾IMC
- 台湾Gyoung
- 台湾CipherLAB
- 日本DENSO
- 日本Opticon
- 日本东研tohken

**数据采集终端**

- 美国intermec
- 美国Symbol
- 美国Metrologic
- 美国HHP(honeywell)
- 美国双成
- 日本DENSO
- 日本Casio
- 日本keyence
- 韩国蓝鸟bluebird
- 韩国M3
- 福建新大陆
- 台湾CipherLAB
- 台湾Gyoung

**无线局域网**

- 美国intermec
- 美国Symbol

**不干胶标签**

**条码碳带**

- IMC系列碳带
- 标准腊基碳带
- 混合基碳带
- 树脂基碳带
- 水洗布专用树脂碳带

**条码打印软件**

**条码检测仪**

**条码打印机配件**



**Datalogic PowerScan XLR条码扫描器**

The PowerScan Extra Long Range Bar Code Readers have been specifically designed "from the ground up" to meet the demands of tough industrial applications especially where some labels are scanned up close and others at great distances. With the XLR model you can read 20 mil labels as close as 28" / 71 cm and 100 mil reflective labels as far away as a whopping 36' / 11 m. In any long-range application, you can rely on PowerScan XLR for fast, accurate Bar Code reading of both paper and reflective labels. PSC's QuadraLogic II decoding software enables users to successfully read most dirty, smudged and damaged labels that were previously considered unreadable.

**技术参数**

**General Information**

Manufacturer	Datalogic S.p.A
Manufacturer Part Number	0611070-011008-000
Manufacturer Website Address	www.datalogic.com
Brand Name	Datalogic
Product Line	PowerScan
Product Model	XLR
Product Name	PowerScan XLR Bar Code Reader
Product Type	Handheld Bar Code Reader

**Technical Information**

Connectivity Technology	Wired
Bar Code Symbology Support	<ul style="list-style-type: none"> <li>• UPC-A</li> <li>• UPC-E</li> <li>• JAN-8</li> <li>• JAN-13</li> <li>• EAN-13</li> <li>• EAN-8</li> <li>• Code 39 Full ASCII</li> <li>• Code 39</li> <li>• Codabar</li> <li>• Code 128</li> <li>• Code 93</li> <li>• Interleaved 2 of 5</li> <li>• Standard 2 of 5</li> <li>• MSI/PLESSEY</li> <li>• Pharmacode 39</li> </ul>
Light Source	Laser
Scan Rate	37 scan/s
Maximum Scan Resolution	1.40 mm
Depth of Field	84 mm - 1524 mm@0.38 mm - Code 39 ??? 701 mm - 1829 mm@0.51 mm - Code 39 ??? 701 mm - 1829 mm@1.02 mm - Code 39 ??? 1006 mm - 4.57 m@1.40 mm - Code 39 ??? 1006 mm - 4.57 m@1.02 mm - Code 39 ??? 2042 mm - 7.62 m@1.78 mm - Code 39 ??? 2042 mm - 11 m@2.54 mm - Code 39

**Interfaces/Ports**

Host Interface	Multi-interface
----------------	-----------------

**Power Description**

Input Voltage	4 V DC to 14 V DC
---------------	-------------------

**Environmental Conditions**

Temperature	-30 to 50 Operating ??? -40 to 70 Storage
Humidity	5 to 95%

**Physical Characteristics**

Dimensions	183 mm Height x 68.58 mm Width x 112 mm Depth
Weight	281 g

**Miscellaneous**

Additional Information	<b>Supported Interfaces:</b> Serial Wand Emulation Keyboard Wedge
------------------------	--

**Certifications & Standards**

**Electrical:**  
Gost R

UL  
TUV  
cUL  
**Emissions:**  
FCC -A  
BCIQ CNS13438  
EN 55022-B  
AS/NZS 3548  
VCCI-B  
**Laser Safety:**  
CDRH Class IIIA  
IEC 60825 Class 2

Green Compliance Yes  
Green Compliance Certificate/Authority RoHS

版权所有(C) 2006—2011 上海全亨科技  
地址: 上海市浦东大道1097号15号楼4E室 邮编: 200135 邮箱: mail#jahone.cn  
电话: 021-51088451 51088452 传真: 021-50935062

